

INNOVATING THE FUTURE




Commercial T5 High Output Series LED Tube

LINEAR FLUORESCENT RETROFIT LAMP
For: T5 HO lamp replacement

FEATURES AND BENEFITS

- Efficacy of 130LPW
- Integrated driver, Type-B (Direct-Wire)
- Double ended input for simple rewiring and shorter install time
- Bypasses ballast for maximum energy savings
- G5 UL listed lampholders for 100-277VAC included
- Flicker-free LED Lighting

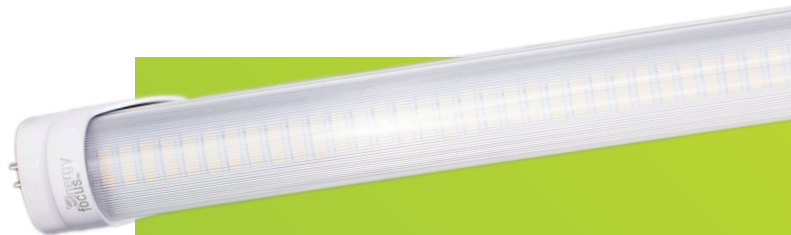

PRODUCT SPECIFICATIONS

Length	46" versions available. Meets ANSI standard
Body	Oval extruded aluminum/ polycarbonate lens
Lens	Clear (striated)
Connection	Mini bi-pin (G5) endcap
Input Voltage	100-277vac, 50/60hz
Driver	Double ended (end-to-end) input; integrated LED driver
Available colors	3500K 4000K 5000K
CRI	>80
Dimming	Non-dimmable
Lifetime	L70 ≥ 60,000 hours
Warranty	10-year warranty
Environmental Requirements	Operating temp: -20° to 50°C Storage temp: -30° to 60°C Working humidity: 30% to 85% Storage humidity: 10% to 90% Non-corrosive environments
Power Factor	>0.9
Beam Angle	120°



PRODUCT SPECIFICATION

PART NUMBER	SIZE NOMINAL	POWER	LUMINOUS FLUX	UL PART NUMBER	DLC FAMILY
LEDFLT5-835-426-302C	(46") 4'	26W	3380lm	3BG10266	EAEFPX
LEDFLT5-840-426-302C	(46") 4'	26W	3380lm	3BG10266	EAEFPX
LEDFLT5-850-426-302C	(46") 4'	26W	3380lm	3BG10266	EAEFPX
LEDFLT5-835-426-3B2C*	(46") 4'	26W	3380lm	3BG10266	EAEFPX
LEDFLT5-840-426-3B2C*	(46") 4'	26W	3380lm	3BG10266	EAEFPX
LEDFLT5-850-426-3B2C*	(46") 4'	26W	3380lm	3BG10266	EAEFPX

* B = Buy American version

ACCESSORIES

- G13 TOMBSTONE, T5 TO T8, comes with T5 High Output Lamp purchase (model no. LEDFLSLH-G13NS-CT5)
- T5 High Output Lampholder pair, one wired (Model no. LEDFLSLH-G13NS-CT5WP)

LINE DIAGRAM

Double-Ended Input

