

T8 LED U-BEND

U-BEND LED RETROFIT LAMP

For T8 U-Bend fluorescent lamp replacement

The Energy Focus T8 LED U-Bend tube is a three-in-one Type A+B retrofit solution. It can be installed as a ballast compatible Type A lamp. It also functions as a Type B lamp that can be installed as single-ended power or double-ended power. The CCT switch offers three color temperature selections within the lamp.

FEATURES AND BENEFITS

- Three installation methods: Type A, Type B single-ended, Type B double-ended
- Three CCT switchable design
- NSF rated shatterproof design
- Current leakage protection that passes the new UL 1993 standard
- Reduces energy consumption up to 60%

PRODUCT SPECIFICATIONS

Length	22.5"
Body	Glass Coating
Lens	Frosted
Connection	Medium bi-pin (G13) end cap
Input Voltage	120-277vac, 50/60hz
Driver	Single end power or double end power; integrated LED driver
Available colors	3 CCT Switchable (3500K, 4000K, 5000K)
CRI	Ra83
Dimming	Non-dimmable
Lifetime	≥ 50,000 hours
Warranty	5 Years
Environmental Requirements	Operating temp: -20° to 45°C Storage temp: -45° to 85°C Relative humidity: 45% to 85% Non-corrosive environments
Power Factor	>0.9
Beam Angle	200°




PRODUCT SPECIFICATION

PART NUMBER	SIZE	NOMINAL POWER	LUMINOUS FLUX
LEDFLT-8CS-215-GL-AB	22.5"L x 2.7"W	15W	1950lm
LEDFLUB-8CS-215-GL-AB	22.5"L x 6.7"W	15W	1950lm

PRODUCT DIMENSIONS

LED U-BEND NARROW (MM)

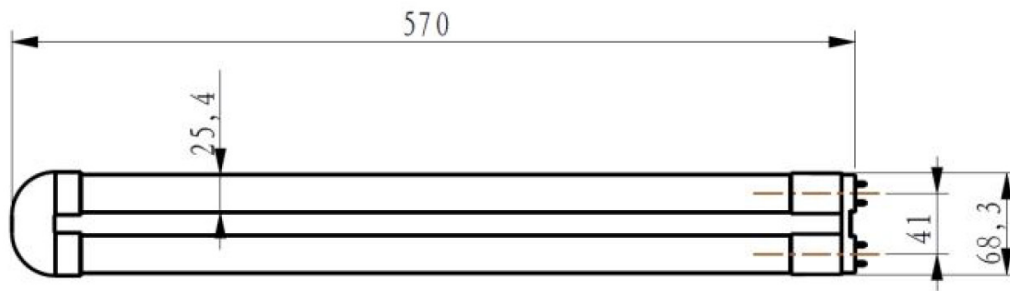

LED U-BEND WIDE (MM)

